

# Saturna 4001LED Maxi Ceiling Mount

INTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	DRIVER LOCATION	OPTIONS	COLOUR
4001	1x16L <i>LED module</i> 16 watt	40* <i>4000K</i> 1700 lumens <sup>1</sup>	120* 208 240 277 347	RF* <i>frost</i>	REM* <i>remote driver</i> INT <i>integral driver</i>	WL <i>wet location label</i> (covered ceilings)	WT <i>white texture</i> BT <i>black texture</i> SM <i>silver metallic</i> AN <i>aluminum natural</i> BZ <i>bronze</i> GM <i>gunmetal</i> WS <i>white satin</i> BM <i>black matte</i> RAL <i>specify no.</i>

\*Standard configuration unless otherwise specified <sup>1</sup>Delivered lumens (4000K, 80CRI)

SAMPLE CATALOG NUMBER: 4001 - 1x16L - 40 - 120 - RF - REM - WT

Using this catalog number would order 1 model 4001 surface ceiling mount luminaire with a 16 watt, 4000K, 1700 lumen light engine wired to 120 volts, with a frosted glass globe, painted with white texture polyester powder coat. Remote mounted driver.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Luminaire housing: Cast aluminum. Gasket: EPDM rubber. Strut assembly: Aluminum sheet, keyholed removal. Reflector disks: Aluminum sheet. Lens/diffuser: Threaded, 4.4" tempered glass. Fasteners: Stainless steel.</p> <p>LED Components</p> <p>Driver: Constant current, 450mA. Light Engine: Chip-on-Board 13mm LES. Zhaga Book 3 Compliant Socket.</p>	<p>Luminaire is designed to mount over a recessed 4" octagon j-box. Backstrap mounts to the ears of the j-box. Integral driver option provides a driver compartment at the ceiling line. Additional mounting holes are provided for mounting independent of the junction box ears.</p>	<p>Standard threaded frosted globe. Strut and disk assembly shield light source.</p>	<p>The Saturna maxi ceiling mount is listed for use in damp locations to UL and CSA Standards. An optional wet location label can be provided. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

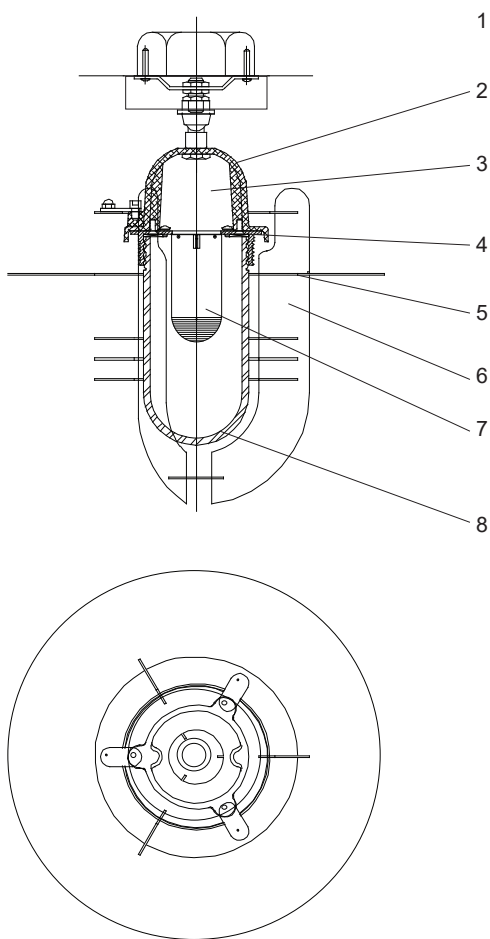


## Saturna 4001LED Detailed Product Description

- |   |                                       |   |   |
|---|---------------------------------------|---|---|
| 1 | 4" Recessed Octagon J-Box (By Others) | 6 | Strut Assembly - Keyholed Removal .125" Aluminum      |
| 2 | Housing - Cast Aluminum               | 7 | Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket |
| 3 | Heatsink                              | 8 | Lens/Diffuser - Frosted Glass Threaded - Tempered     |
| 4 | Gasket - E.P.D.M. Rubber              | 9 | Driver (Remote Standard) 450mA, 120-277 Volt Input    |
| 5 | Reflector Disks - .125" Aluminum      |   |   |

## Saturna 4001LED Maxi Ceiling Mount

### Integral Driver Canopy Detail

---

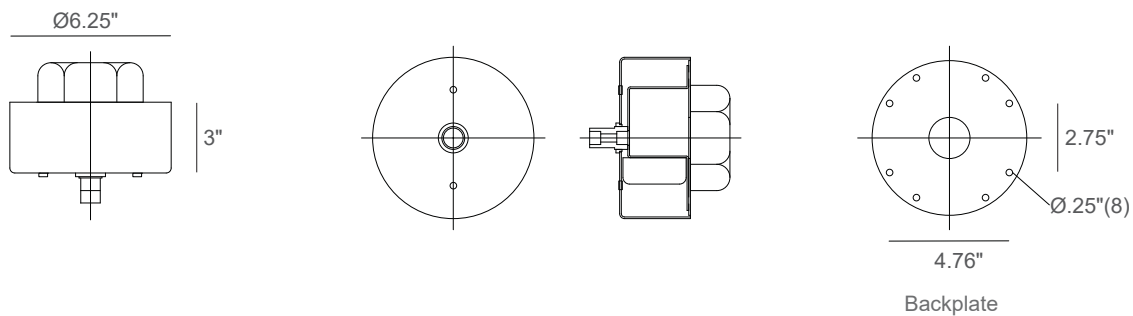

### Remote Driver Detail

---

