

Saturna 4003LED Maxi Pendant Mount

INTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	DRIVER LOCATION	OPTIONS	COLOUR
4003	1x16L <i>LED module</i> 16 watt	40* <i>4000K</i> 1700 lumens ¹	120*	RF* <i>frost</i>	REM* <i>remote driver</i>	WL <i>wet location label (covered ceilings)</i>	WT <i>white texture</i>
			208		INT <i>integral driver</i>	C86 <i>45° ball aligner hanger</i>	BT <i>black texture</i>
			240			P(_) <i>pendant length</i>	SM <i>silver metallic</i>
			277				AN <i>aluminum natural</i>
			347				BZ <i>bronze</i>
							GM <i>gunmetal</i>
							WS <i>white satin</i>
							BM <i>black matte</i>
							RAL <i>specify no.</i>

*Standard configuration unless otherwise specified ¹Delivered lumens (4000K, 80 CRI)

SAMPLE CATALOG NUMBER: 4003 - 1x16L - 40 - 120 - RF - REM - P24 - WT

Using this catalog number would order 1 model 4003 pendant mount luminaire with a 16 watt, 4000K, 1700 lumen light engine wired to 120 volts, with a frosted globe, a pendant length of 24" and painted with white texture polyester powder coat. Remote mounted driver.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Luminaire housing: Cast aluminum. Gasket: EPDM rubber. Strut assembly: Aluminum sheet, keyholed removal. Reflector disks: Aluminum sheet. Lens/diffuser: Threaded, 4.4" tempered glass. Stem: Steel tubing with hangstraight swivel. Fasteners: Stainless steel.</p> <p>LED Components</p> <p>Driver: Constant current, 450mA. Light Engine: Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket</p>	<p>Luminaire is designed to mount over a recessed 4" octagon j-box. Backstrap mounts to the ears of the j-box. For wet locations luminaire must be restrained from wind action. Special hanger or restraint required. A +/- 5° hangstraight is provided. Optional 45° ball aligner is offered.</p>	<p>Standard threaded frosted globe. Strut and disk assembly shield light source. Top reflector disk controls upward light.</p>	<p>The Saturna maxi pendant is listed for use in damp locations to UL and CSA Standards. An optional wet location label can be provided. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

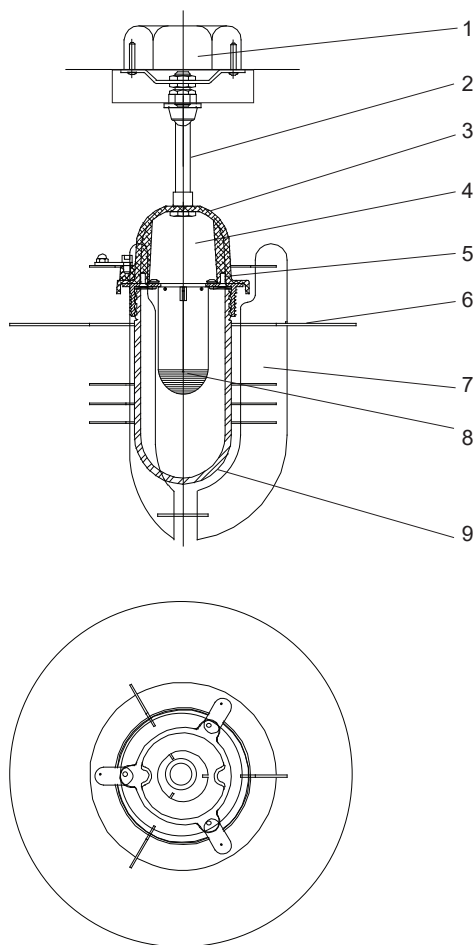


Saturna 4003LED Detailed Product Description

- | | | | |
|---|---|----|---|
| 1 | 4" Recessed Octagon J-Box (By Others) | 7 | Strut Assembly - Keyholed Removal .125" Aluminum |
| 2 | Stem - 1/2" Steel Tubing with Hangstraight Swivel | 8 | Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket |
| 3 | Housing - Cast Aluminum | 9 | Lens/Diffuser - Frosted Glass Threaded - Tempered |
| 4 | Heatsink | 10 | Driver, (Remote Mounted) 450mA, 120-277 Volt Input |
| 5 | Gasket - E.P.D.M. Rubber | | |
| 6 | Reflector Disks - .125" Aluminum | | |

Saturna 4003LED Maxi Pendant Mount

Integral Driver Canopy Detail

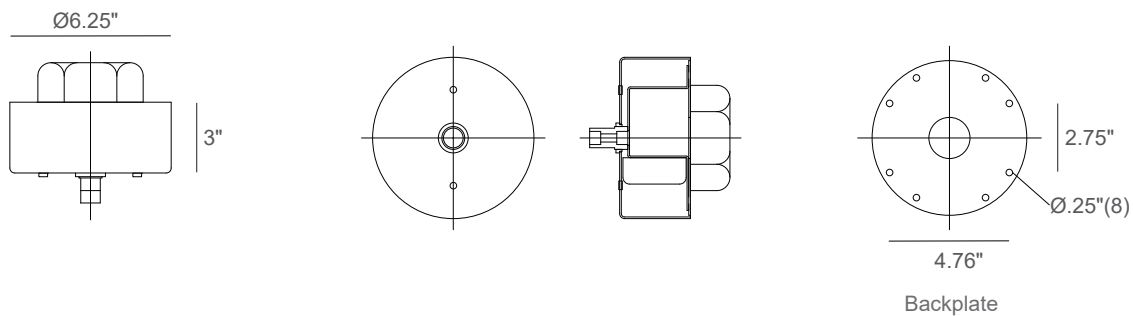

Remote Driver Detail

