

# Saturna 4007LED Maxi Post Arm Streetscape Shepherd's Hook EXTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	COLOUR
4007	1x16L <i>LED module</i> 16 watt	40* <i>4000K</i> 1700 lumens <sup>1</sup>	120*	RF* <i>frost</i>	WT <i>white texture</i>
			208		BT <i>black texture</i>
			240		SM <i>silver metallic</i>
			277		AN <i>aluminum natural</i>
			347		BZ <i>bronze</i>
					GM <i>gunmetal</i>
					WS <i>white satin</i>
					BM <i>black matte</i>
					RAL <i>specify no.</i>

\*Standard configuration unless otherwise specified <sup>1</sup>Delivered lumens (4000K, 80 CRI)

SAMPLE CATALOG NUMBER: 4007 - 1x16L - 40 - 120 - RF - WT

Using this catalog number would order 1 model 4007 post arm luminaire with a 16 watt, 4000K, 1700 lumen light engine wired to 120 volts, with a frosted glass globe and painted white texture. Poles are supplied separately.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Housing: Cast aluminum. Gasket: EPDM rubber. Strut assembly: Aluminum sheet, keyholed removal. Reflector disks: Aluminum sheet. Lens/diffuser: Threaded, tempered glass. Shepherd's hook arm: Aluminum tube. Post top slip fitter: 4.5" aluminum tube.</p> <p>LED Components</p> <p>Driver: Constant current, 450mA. Light Engine: Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket</p>	<p>The Saturna 4007 luminaire incorporates a 4.5" diameter driver housing that slips over a 4.0" diameter pole. The assembly is locked onto the pole with three 1/4 - 20 socket set screws. The driver tray is removable and the wiring is connected to the internal pole wiring that is supplied by others.</p>	<p>The 4007 series is a Type V distribution, non-cut-off classified product. The frosted glass diffuser softens the light. Strut and disk assembly shield light source. Top reflector disk controls upward light.</p>	<p>The Saturna maxi post arm is listed for use in wet locations to UL and CSA Standards. Windloading EPA = 1.25 Sq. Ft. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

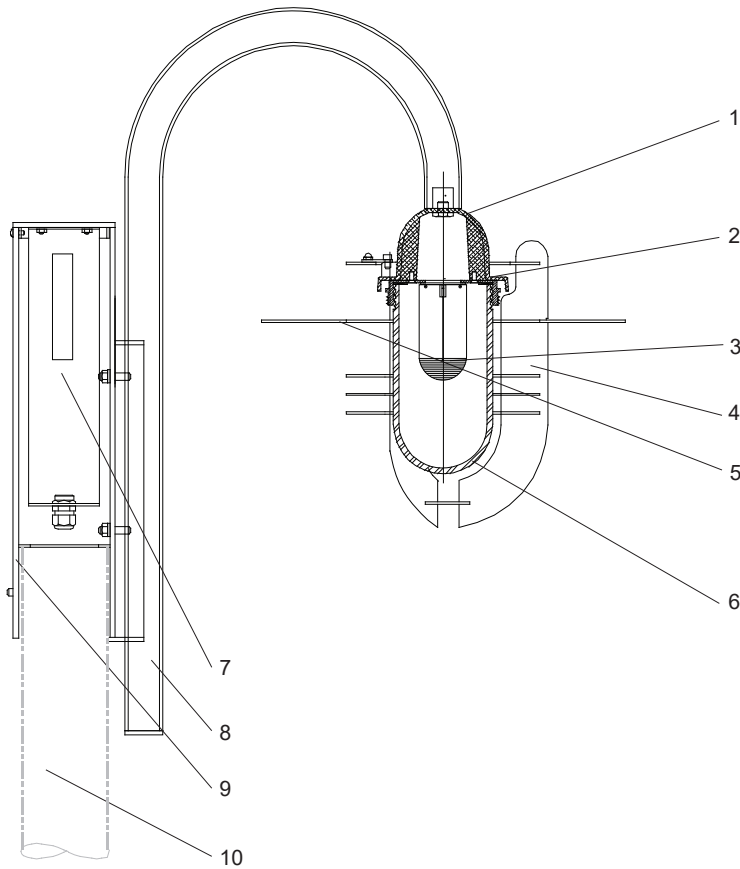

## Saturna 4007LED Detailed Product Description

- |   |   |    |  |
|---|---|----|--|
| 1 | Housing - Cast Aluminum                               | 7  | Driver - 450mA, 120-277 Volt Supply                  |
| 2 | Gasket - E.P.D.M Rubber                               | 8  | Shepherd's Hook Arm 1 5/8" x 1/8" Wall Aluminum Tube |
| 3 | Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket | 9  | Post Top Slip Fitter 4.5" Aluminum Tube              |
| 4 | Strut Assembly - Keyholed Removal .125" Aluminum      | 10 | Pole (Not Included - Order Separately) Ø4.0"         |
| 5 | Reflector Disks - .125" Aluminum                      |    |  |
| 6 | Lens/Diffuser - Frosted Glass Threaded - Tempered     |    |  |