

# Streamline 6005ULED Maxi Direct Wall Mount Area Light EXTERIOR


MODEL	WATTS		COLOR TEMPERATURE		VOLT	DISTRIBUTION		OPTIONS		COLOR	
6005U	200L	1 x 200 watts 18,600 lumens¹	3K	3000K	120*	T2	type II distribution	DIM	0 - 10 volt dimmable driver	WT	white texture
			35K	3500K		208				T3	type III distribution
	167L	1 x 167 watts 15,500 lumens¹	4K	4000K	240	T4	type IV distribution	SM	silver metallic		
			134L	1 x 134 watts 12,400 lumens¹		5K		5000K	277	AN	aluminum natural
	BZ	bronze									
	GM	gunmetal									
	WS	white satin									
	BM	black matte									
									RAL	specify no.	

\*Standard configuration unless otherwise specified +Consult factory <sup>1</sup>Delivered lumens (4000K)

SAMPLE CATALOG NUMBER: 6005U - 200L - 4K - 120 - T2 - WT

Using this catalog number would order 1 model 6005U maxi direct wall mount luminaire with a 200 watt, 4000K light engine wired to 120 volts, with type II distribution, painted whitetexture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p><b>Materials</b> Adjustable lamp housing: Cast aluminum. Driver enclosure: Cast aluminum with top cover plate. Light engine enclosure: Cast aluminum sealed to lens frame. Lens: Clear tempered glass in cast aluminum gasketed frame.</p> <p><b>Electrical Components</b> Light engine: Aluminum core PCB each with 4 Luxeon 'M' emitters and Ledil Strata - SQ optics. Driver: High efficiency, &lt;20% THD, &gt;90% PF</p>	<p>The 6005ULED series is designed for wall mounting over a 4" octagonal recessed j-box. Wall must have sufficient strength to support luminaire. A heavy gauge mounting plate attaches to the wall surface. Head hooks on to plate and locks in place with two stainless steel set screws. Silicone seal is required along top of driver compartment and down sides to keep moisture from entering driver compartment. Maximum fixture weight 83 lbs.</p>	<p>The 6005ULED optical system is type II, III or IV with a full cutoff classification.</p>	<p>The 6005ULED is listed for use in wet locations to UL and CSA standards.</p> <p>LEDs are rated for 50,000 hour life with lumen maintenance &gt; 70% (L70).</p>

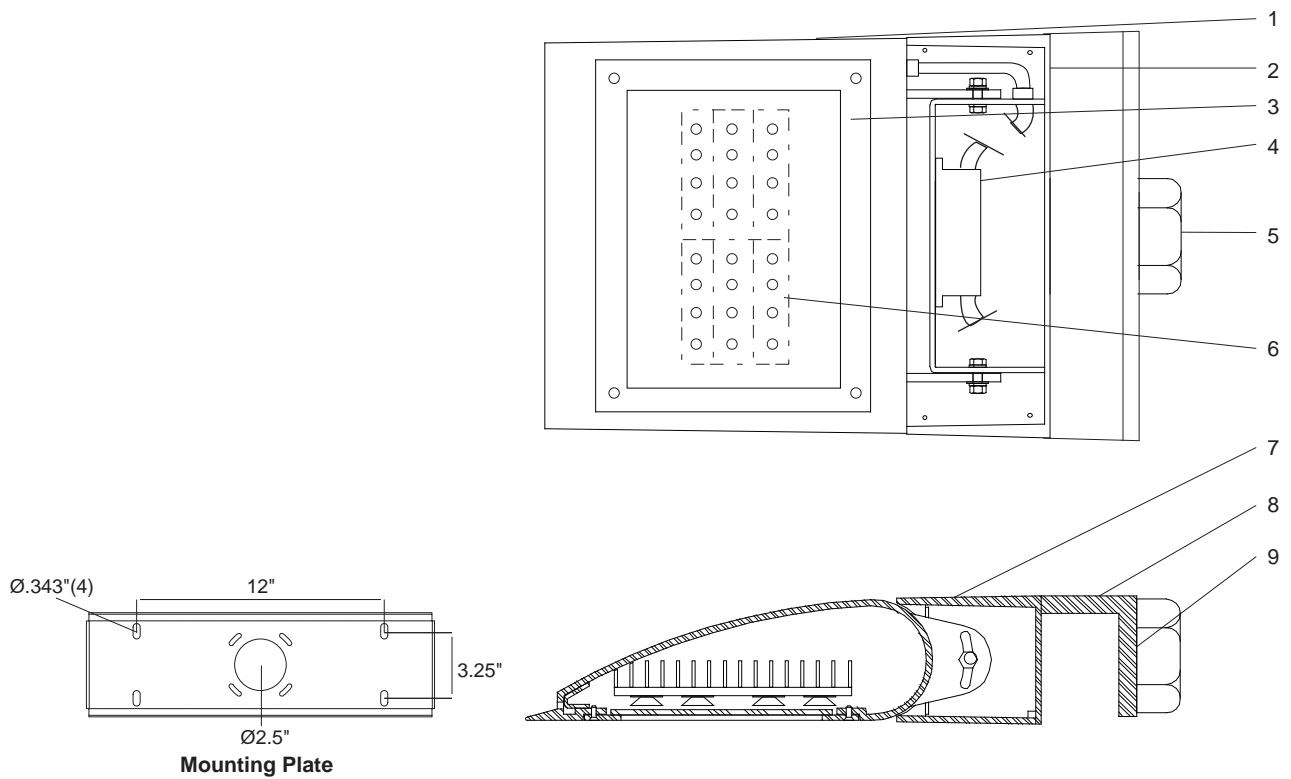

## Streamline Direct 6005ULED Detailed Product Description

- |   |   |   |   |
|---|---|---|---|
| 1 | Adjustable LED Housing - Cast Aluminum                | 6 | LED Boards 4 x Luxeon 'M' Emitters Each |
| 2 | Driver Enclosure - Cast Aluminum with Top Cover Plate | 7 | Housing Assembly                        |
| 3 | Enclosed LED Glass Frame and Heat Sink Assembly       | 8 | Cantilever Support Arm - Cast Aluminum  |
| 4 | Driver  | 9 | Mounting Plate                          |
| 5 | Recessed 4" Octagon J-Box (By Others)                 |   |   |