

RTx4 4401 Medium Wall Mount

INTERIOR/EXTERIOR

MODEL	WATTS	COLOR TEMPERATURE	VOLT	OPTIONS	COLOR
4401	39L <i>39 watts¹ 2801 lumens²</i>	40* <i>4000K</i>	120*	DIM <i>0 - 10 volt dimming</i>	WT <i>white texture</i>
	25L <i>25 watts¹ 1923 lumens²</i>	30 <i>3000K</i>	208	EM <i>integral emergency battery</i>	BT <i>black texture</i>
	18L <i>18 watts¹ 1502 lumens²</i>		240	IND <i>indirect mounting (dry/damp locations only)</i>	SM <i>silver metallic</i>
			277		AN <i>aluminum natural</i>
					BZ <i>bronze</i>
					GM <i>gunmetal</i>
					WS <i>white satin</i>
					BM <i>black matte</i>
					RAL <i>specify no.</i>


*Standard configuration unless otherwise specified

¹Nominal LED Power ²Delivered (4000K, 80CRI), lumens per module

SAMPLE CATALOG NUMBER: 4401 - 25L - 40 - 120 - DIM - WT


Using this catalog number would order 1 model 4401 wall mount luminaire with a 25 watt LED module with a color temperature of 4000K wired to 120 volts, 0 to 10 volt dimming driver, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials All aluminum construction, stainless steel tamper resistant hardware, acrylic lens.</p> <p>Electrical Components Integral constant current driver 500mA, 700mA or 1050mA. Aluminum core PCB with 12 LEDs, 80 CRI standard. Optional dimming driver.</p>	<p>The RTx4 4401 is designed for wall mounting over a recessed 4" octagon j-box (by others). A heavy gauge mounting plate is secured to the wall independently of the j-box. The main housing hooks on to the mounting plate and is secured by two stainless steel set screws.</p>	<p>The RTx4 4401 luminaire uses a flush mount acrylic lens with micro diffusion film for optimal visual comfort.</p>	<p>The RTx4 4401 is listed for use in wet locations to UL and CSA Standards. Indirect option suitable for dry/damp locations only. Reported L70 > 50,000 hours. IP65 rated.</p>

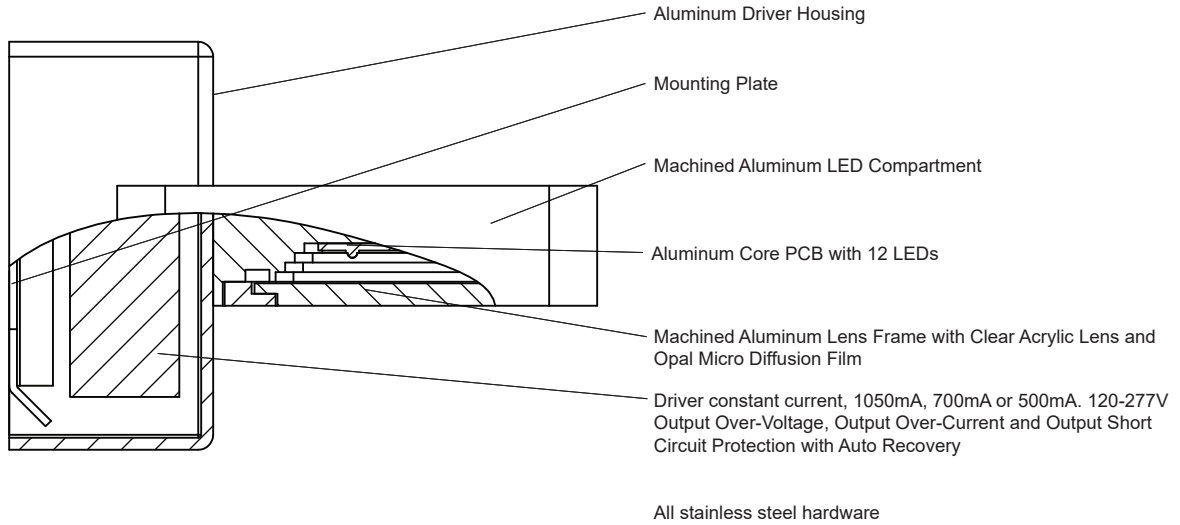


RTx4 4401 Medium Wall Mount

POLAR GRAPH 4401-39L (4000K)

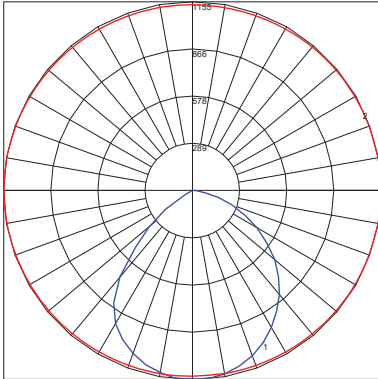

Maximum Candela = 1155 Max. Candela Angle 5H 5V
 #1 - Vertical place Through Horizontal Angles (15-185)
 #2 - Horizontal Cone Through Vertical Angle (5) Through Max. Cd.

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

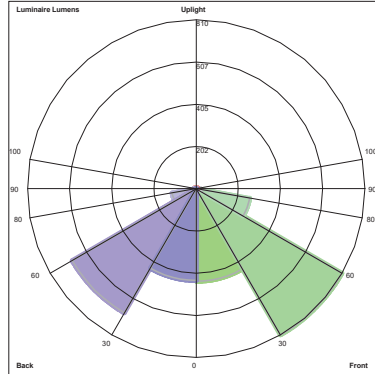

Luminaire Lumens: 4401-39L (4000K)
 Front: Low=444.1, Medium=809.9, High=260.9, Very High=19.1
 Back: Low=440.2, Medium=688.3, High=116.9, Very High=7.8
 Uplight: Low=7.8, High=5.6

BUG Rating : B1-U1-G1

Product	CCT	CRI	Delivered Lumens	Nominal LED Power	System Power	Lumens per Watt*
4401-39L	4000	80	2801	39 watts	42.6 watts	65.8
4401-25L	4000	80	1923	25 watts	28.4 watts	67.7
4401-18L	4000	80	1502	18 watts	19.6 watts	76.6

Lumen Multiplier	3000K - 0.95
------------------	--------------

*Based on system power