

# Encore ENC3 Pendant Mount

INTERIOR/EXTERIOR

MODEL	LENGTH	WATTS	COLOR TEMPERATURE	VOLT	OPTIC	DRIVER LOCATION	OPTIONS	COLOR
ENC3	12"	19L <sup>19 watts<sup>1</sup></sup> <sub>2115 lumens<sup>2</sup></sub>	40* 4000K	120*	SP 20° spot	REM remote	DIM 0 - 10 volt dimming	WT white texture
	18"	13L <sup>13 watts<sup>1</sup></sup> <sub>1535 lumens<sup>2</sup></sub>	35 3500K	208	NF 30° narrow	INT integral	WL wet location	BT black texture
	24"		30 3000K	240	FL 50° flood		P( "_ ) pendant length	SM silver metallic
	30"	9L <sup>9 watts<sup>1</sup></sup> <sub>1123 lumens<sup>2</sup></sub>	27 2700K	277	WF 80° wide			AN aluminum natural BZ bronze GM gunmetal WS white satin BM black matte RAL specify no.


\*Standard configuration unless otherwise specified

<sup>1</sup>Nominal LED Power <sup>2</sup>Delivered (4000K, 80CRI), lumens per module


SAMPLE CATALOG NUMBER: ENC3 - 12" - 19L - 40 - 120 - SP - REM - WT

Using this catalog number would order 1 model ENC3 12" pendant mount luminaire with 19 watt LED module with a spot optic and a color temperature of 4000K wired to 120 volts, driver is remote mounted, luminaire is painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p><b>Materials</b> All aluminum construction, stainless steel tamper resistant hardware, acrylic lens.</p> <p><b>Electrical Components</b> Constant current driver 500mA, 350mA or 250mA, COB with Zhaga compliant socket, 80 CRI standard. Optional dimming driver compatible with IEC60929:2006 0-10V ballast controls.</p>	<p>The ENC3 series is designed for ceiling mounting. A heavy gauge mounting plate is secured independently of the recessed octagon J-Box (by others) through holes provided. Integrally mounted driver uses 4.5 or 5.0 cubic inches of J-Box volume. A suitable J-Box example is 15 cubic inch capacity Iberville 54151 or 21 cubic inch capacity Iberville 54171 (not included). For ease of installation a 2.125" deep 21 inch cubic capacity J-Box is recommended when possible.</p>	<p>The ENC3 luminaire uses Chip-on-Board technology with Zhaga Book 3 compliant socket and high efficiency twist lock reflector with clear acrylic lens.</p>	<p>The ENC3 series is listed for use in dry/damp locations to UL and CSA Standards. Optional wet location listing available. Reported L70 &gt; 50,000 hours. IP65 rated.</p>

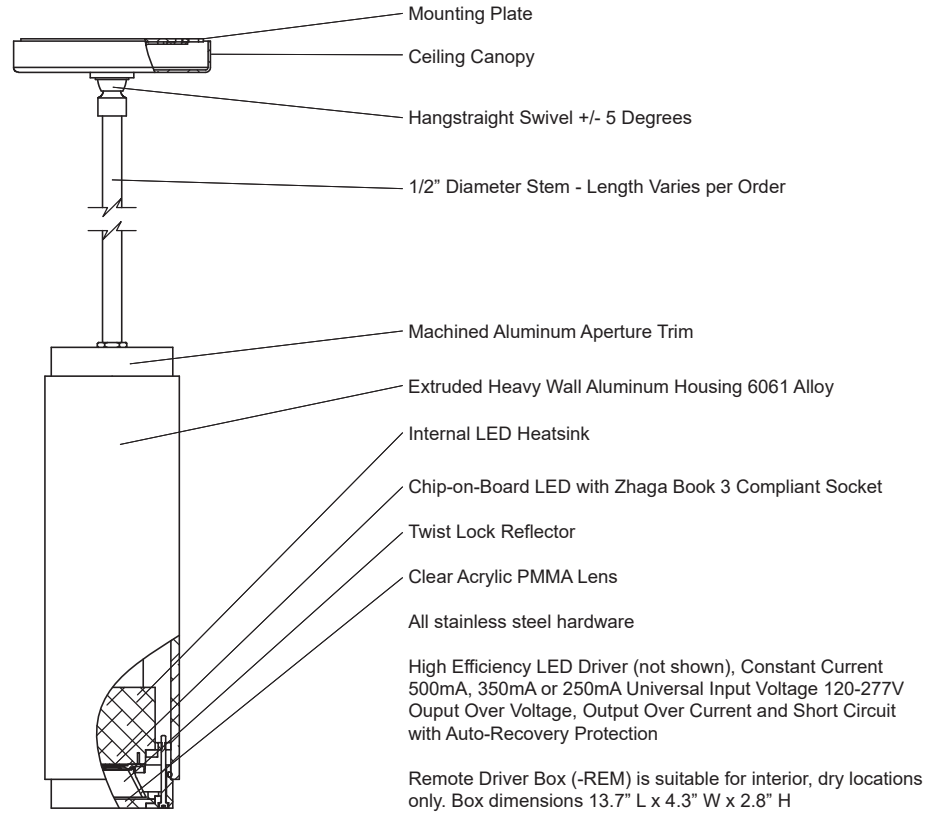

## Encore ENC3

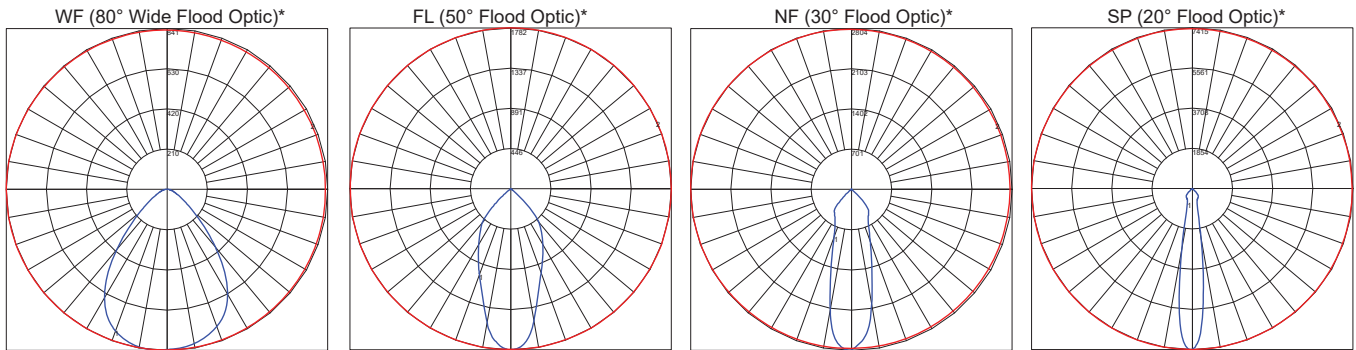

\*Based on ENC3-13L

Product	CCT	CRI	Delivered Lumens	Nominal LED Power	System Power	Lumens per Watt*
ENC3-19L	4000	80	2115	19 watts	19.4 watts	109.0
ENC3-13L	4000	80	1535	13 watts	12.9 watts	118.9
ENC3-9L	4000	80	1123	9 watts	10.7 watts	104.9

\*Based on system power